




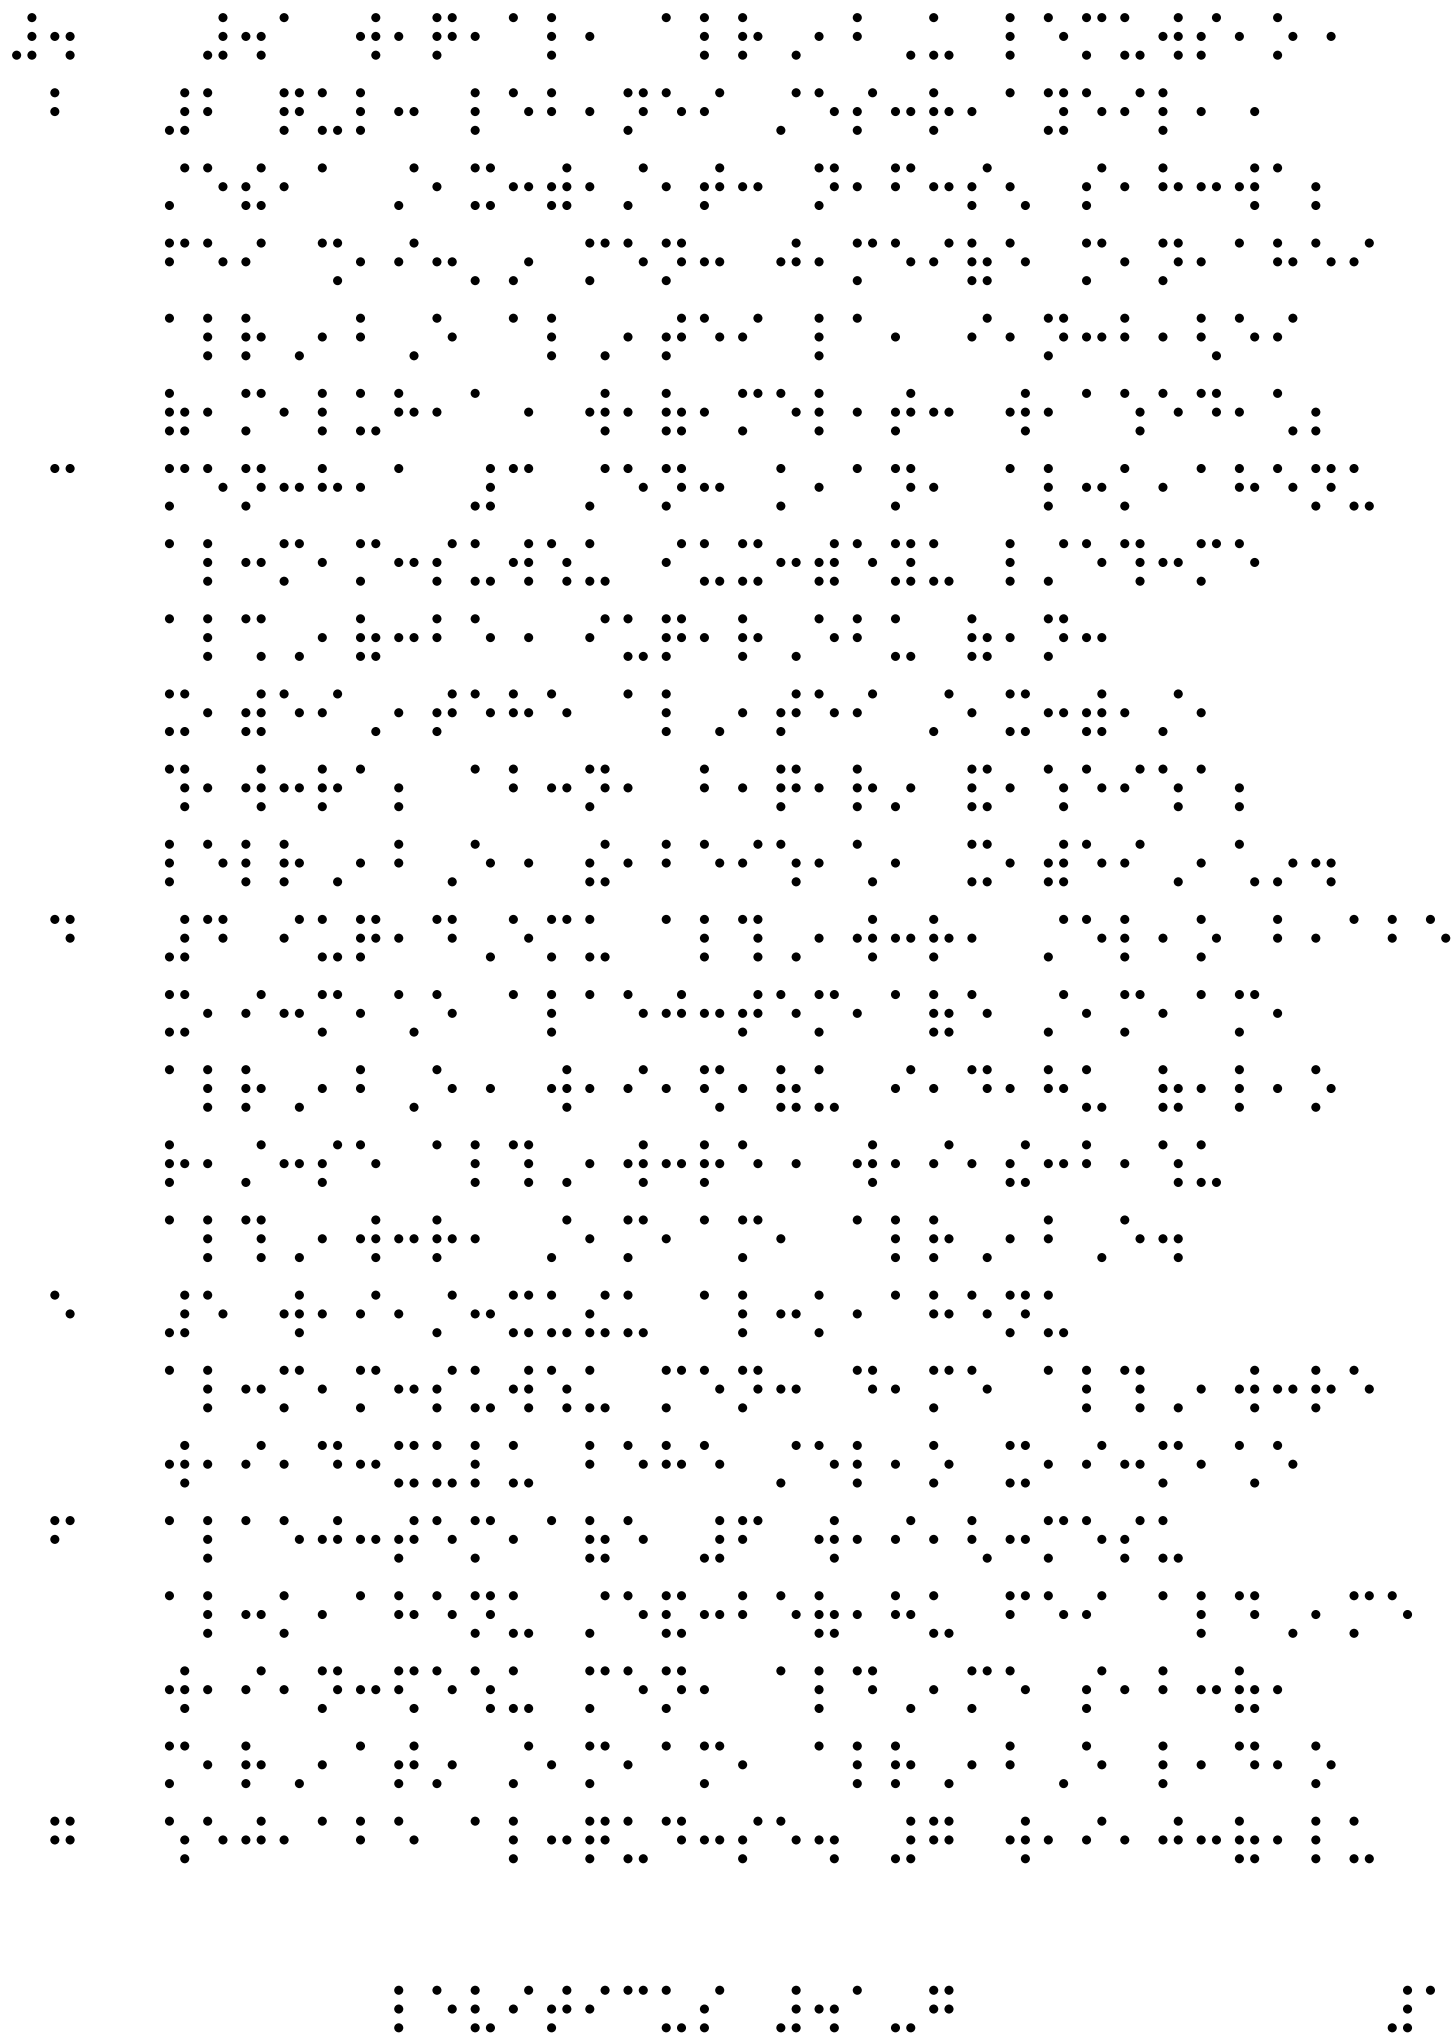

The image displays a 10x10 grid of 100 small dot patterns. Each pattern is a unique combination of 10 binary digits (0s and 1s), arranged in a 2x5 grid within each cell. The patterns are organized into 10 rows and 10 columns, with each row and column containing a different set of patterns. The patterns are arranged in a way that they can be read as a sequence of 100 binary digits, from top-left to bottom-right.

A 3x15 grid of dots representing a sparse matrix. The dots are arranged in a pattern that suggests a banded structure with some off-diagonal elements.

A 3x3 grid of dots. The top row has dots in the second and third columns. The middle row has a dot in the second column. The bottom row has dots in the first and second columns.





The image displays a 10x10 grid of 100 small dot patterns. Each pattern is a unique visual representation of a 10-bit binary string. The patterns are arranged in 10 rows and 10 columns, with each row containing 10 patterns and each column containing 10 patterns. The patterns are generated by a random process, resulting in a diverse set of visual representations for each 10-bit binary string. The patterns are arranged in a grid where each row contains 10 patterns and each column contains 10 patterns. The patterns are generated by a random process, resulting in a diverse set of visual representations for each 10-bit binary string.

